


PACA - RYDE

Series 016

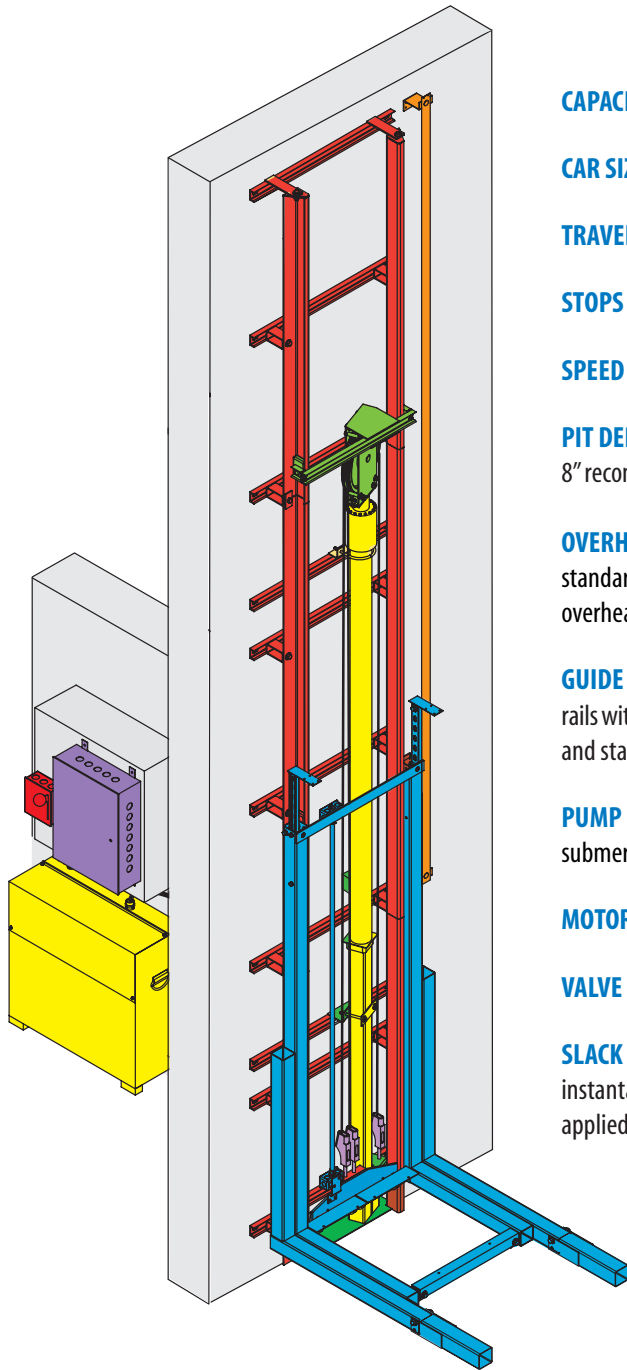

CAPACITY - 1,000 lbs.

CAR SIZE - Maximum of 15 sq. ft.

TRAVEL - up to 50 ft.

STOPS - up to 5 stops

SPEED - 40 feet per minute

PIT DEPTH - 6" minimum pit required, 8" recommended

OVERHEAD - 18" above top floor with standard 7'-0" I.D. car (additional overhead required with some options).

GUIDE RAIL - Two 3/16" steel J-channel rails with 21" in between for a very smooth and stable ride

PUMP UNIT - rotary screw type with submersed motor

MOTOR - single speed, 2HP

VALVE - 2 speed

SLACK CABLE/BROKEN ROPE - twin instantaneous, broken and slack cable applied by retained compression spring

CABLE - two 3/8" 8 x 19 steel cables

ELECTRIC SUPPLY - 208/ 230 volts, single phase, 60 hertz with 3 pole disconnect switch. A separate 120-volt circuit is required for car lighting

CONTROLS - fully automatic at car and landings, car light switch with auto light time out, emergency light, in-use indicator at landings, position indicator in car, field programmable homing feature, modular car wiring, digitally addressed hoistway wiring

SIGNAL SYSTEMS - wall mount phone jack, emergency alarm

HOISTWAY DOOR INTERLOCKS - required at each landing

EMERGENCY LOWERING - automatic descent with back-up power supply

CAR - Frameless car with power accordion gate standard

ADDITIONAL OPTIONS - are available, for details contact your local dealer.

