


CUSTOM-LIFT®

SERIES 010, 210

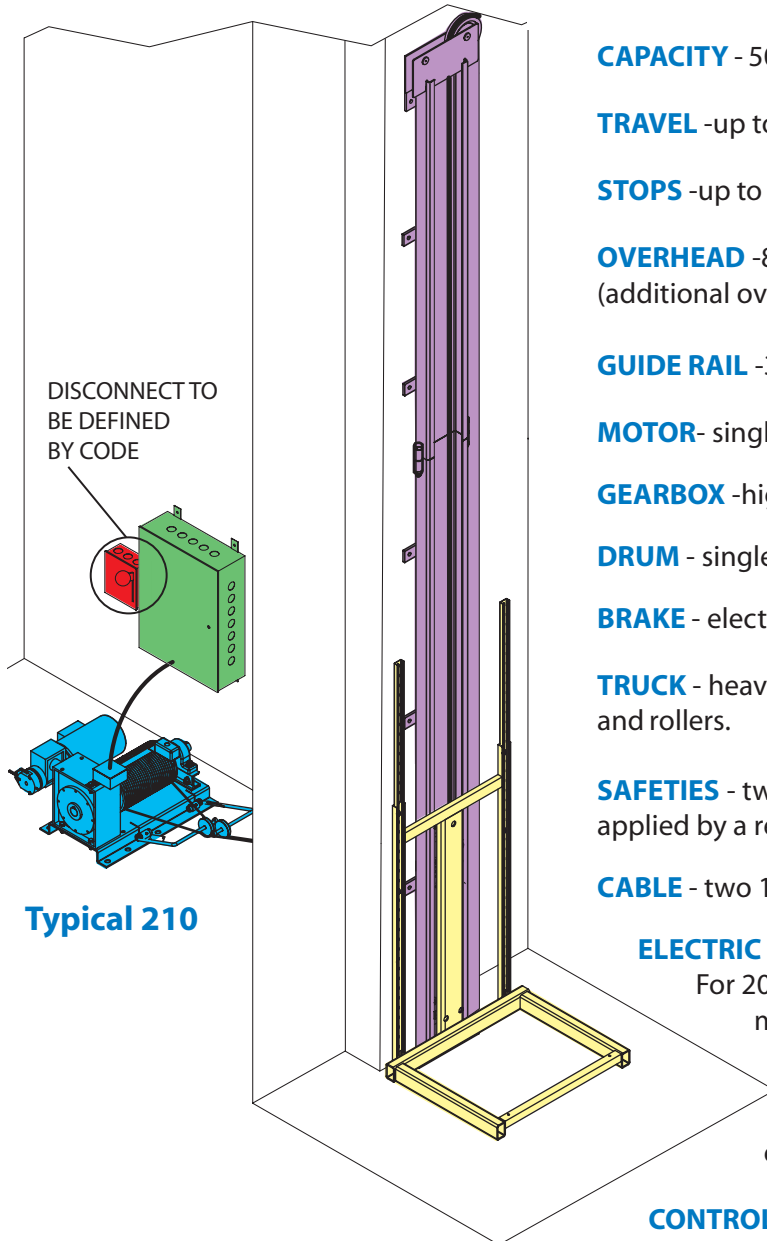

Typical 210

- CAPACITY** - 500LB. **CAR SIZE** - Maximum of 12 sq. ft.
- TRAVEL** - up to 50 ft. **SPEED** - 30 ft. per minute.
- STOPS** - up to 6 stops. **PIT DEPTH** - 6" minimum pit required.
- OVERHEAD** - 8' 0" above top floor with standard 7' I. D. car (additional overhead required with some options).
- GUIDE RAIL** - 3/16" steel channel.
- MOTOR** - single speed, 2HP, instant reversing.
- GEARBOX** - high- ratio, direct mounted and coupled.
- DRUM** - single drum with outboard bearing.
- BRAKE** - electrically released, spring applied.
- TRUCK** - heavy gauge steel with hi-density synthetic guides and rollers.
- SAFETIES** - twin instantaneous, broken cable and slack cable applied by a retained compression spring.
- CABLE** - two 1/4" 8x19 GAC/SA157.
- ELECTRIC SUPPLY** - 230 volts, single phase, 60 hertz.
For 208 volts, single phase, a Buck Boost transformer must be added. A separate 120-volt circuit is required for cab lighting.
- SIGNAL SYSTEM** - wall mount phone jack, emergency alarm.
- CONTROLS** - fully automatic at car and landings, car light switch, emergency stop switch, in-use indicator at landings.
- HOISTWAY DOOR INTERLOCKS** - required at each landing.
- EMERGENCY LOWERING** - manual hand wheel.

ADDITIONAL OPTIONS - are available, for details contact your local dealer.

