


SIDE VIEW OF POWERHEAD






8'
[2438.40]
TYP.

8'
[2438.40]

7'
[2133.60]

RAIL BRACKET

1/4"
[6.35]

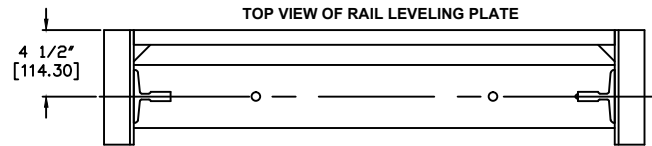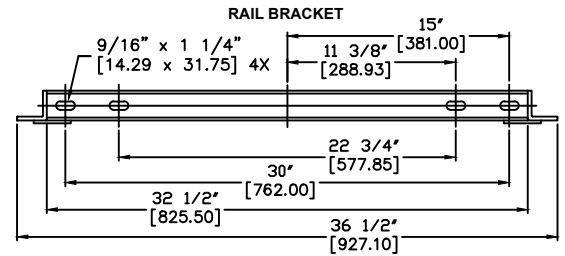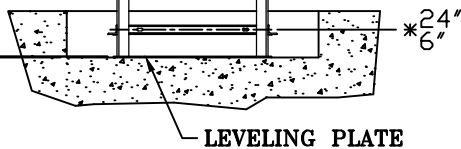

NOTE:

ALL DIMENSIONS ARE IN INCHES.
DIMENSIONS IN [] ARE MM.

BOTTOM RAIL BRACKET CAN BE MOVED IF NEEDED WITHIN THE RANGE NOTED

NOTES:

1. POWERHEAD ANCHOR POINTS WILL BE SPECIFIC TO RAIL BACKING LOCATION.
2. EACH RAIL SECTION SHALL HAVE A MINIMUM OF ONE RAIL BRACKET.
3. SPACING CANNOT BE GREATER THAN 8'-0" BETWEEN RAIL BRACKETS.
4. BRACKET LOCATION MUST BE NO CLOSER THAN 8" TO A RAIL SPLICE.
5. SEE DRAWING C-003071 FOR RAIL AND PIT FLOOR REACTIONS.

NOTE:

RAIL LENGTH = PIT DEPTH + TRAVEL + CAB I.D. HEIGHT + 12"

TOP RAIL MUST BE BETWEEN 14" AND 90"

Waupaca
 ELEVATOR COMPANY™
 1726 North Ballard Road
 Appleton, WI 54911
 Phone: 800-238-8739

ELEVATOR CONTRACTOR:			
JOB NAME:		ORDER NUMBER:	
EXCELEVATOR MRL A3-002610 RAIL LAYOUT			
DRAWN BY:	DATE:	SIGNATURE OF APPROVAL	DWG. NO. C-002914