


(4) 1 3/4" x 9 1/2"
 LAMINATED VENEER LUMBER (LVL)
 HEIGHT OF HOISTWAY IS USED
 TO ANCHOR RAIL BRACKETS

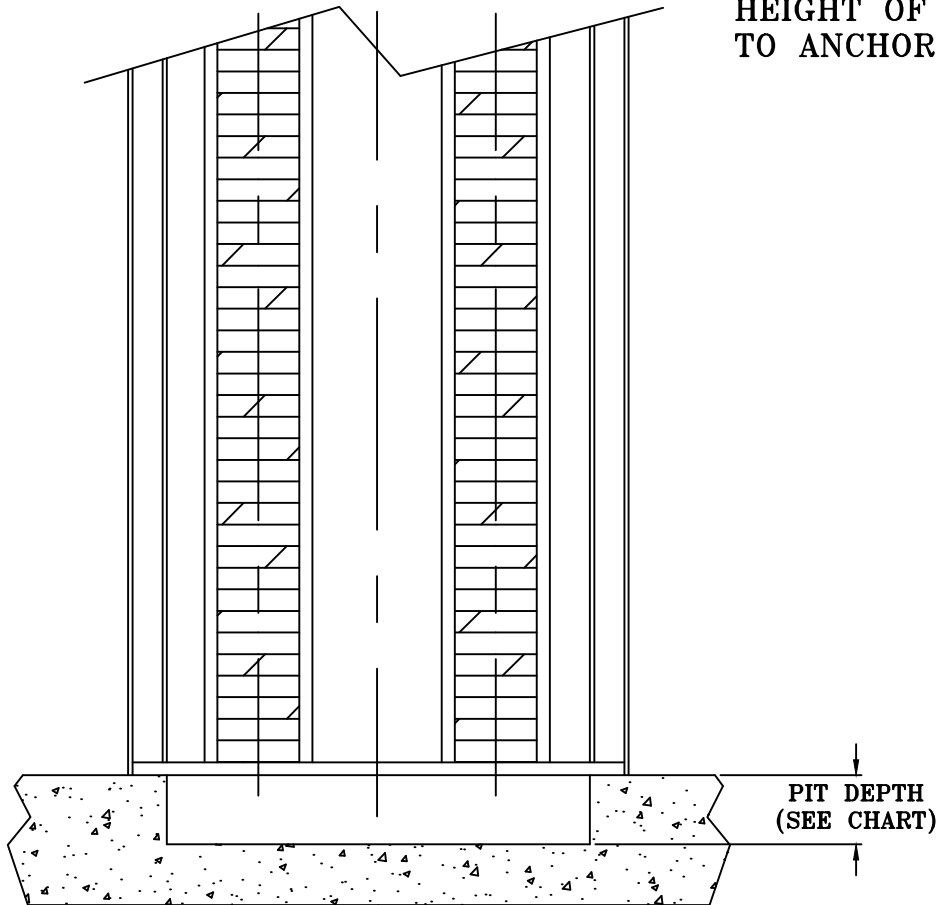

ELEVATOR MODEL	STANDARD PIT DEPTH	
	STANDARD	WITH BUFFER SPRING
EXCELEVATOR	10"	17"
EXCELEVATOR RMR	10"	17"
EXCELEVATOR MRL	10"	17"
PACA-RYDE	8"	15"
PACA-LIFT	8"	15"
PACA-GLIDE	8"	15"

PLEASE CONTACT WAUPACA ELEVATOR FOR MINIMUM PIT DEPTH
 STANDARD PIT DEPTH IS BASED ON MAXIMUM FLOOR THICKNESS OF 1 3/4"

NOTE:
 THIS DRAWING DEPICTS SAMPLE CONSTRUCTION ONLY.
 IT IS THE RESPONSIBILITY OF THE INSTALLER,
 CONTRACTOR, OR ENGINEER TO DESIGN AND SPECIFY
 STRUCTURAL SUPPORTS. ALL CONSTRUCTION TO BE IN
 COMPLIANCE WITH LOCAL CODES.

1726 North Ballard Road
 Appleton, WI 54911
 Phone: 800-238-8739

ELEVATOR CONTRACTOR:			
JOB NAME:		ORDER NUMBER:	
UNIVERSAL RAIL BACKING FOR PACA & EXCELEVATOR SERIES ELEVATORS			
DRAWN BY:	DATE:	SIGNATURE OF APPROVAL	DWG. NO. C-003015