


NOTE:
THIS DRAWING DEPICTS SAMPLE CONSTRUCTION ONLY. IT IS THE RESPONSIBILITY OF THE INSTALLER/CONTRACTOR OR ENGINEER TO DESIGN AND SPECIFY STRUCTURAL SUPPORTS. ALL CONSTRUCTION TO BE IN COMPLIANCE WITH LOCAL CODES.

(4) 1 3/4" x 9 1/2"
LAMINATED VENEER LUMBER (LVL)
HEIGHT OF HOISTWAY IS USED
TO ANCHOR RAIL BRACKETS

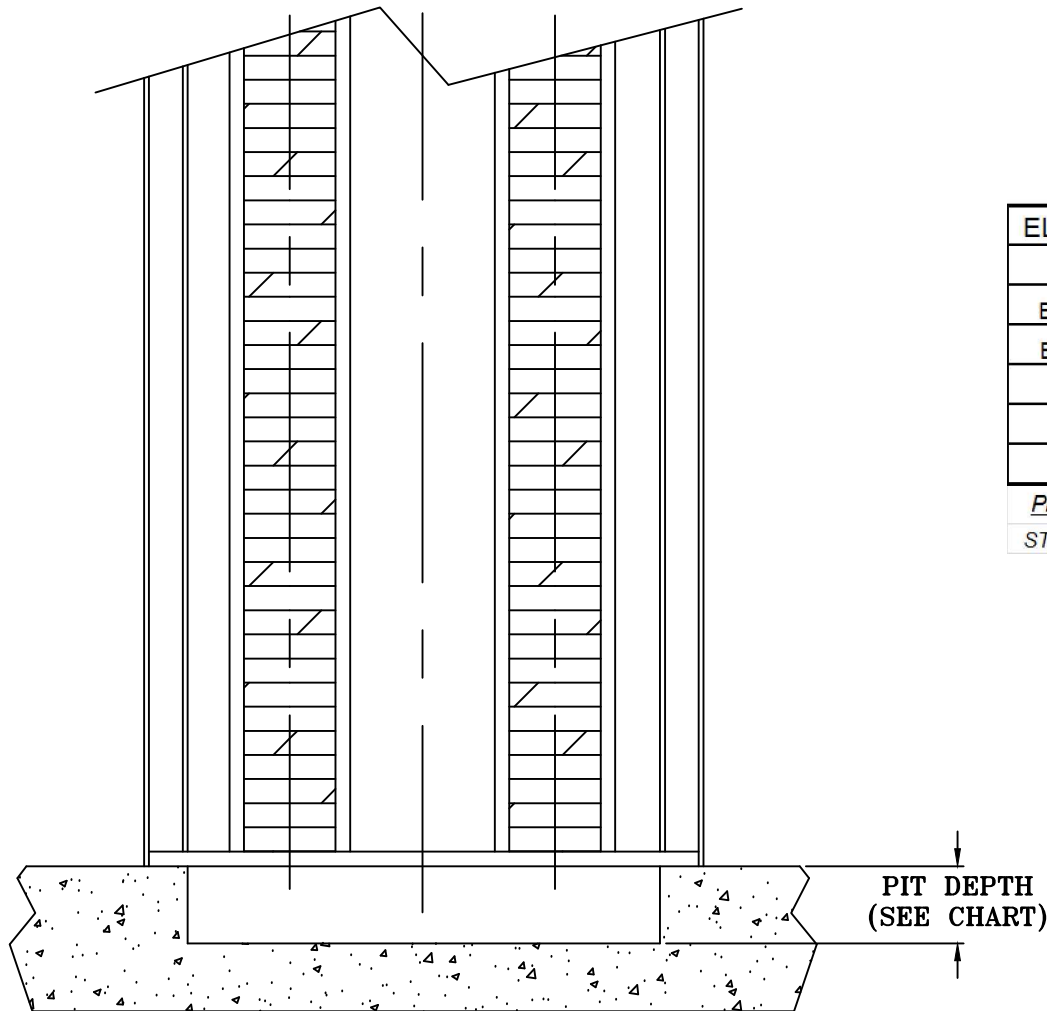

ELEVATOR MODEL	STANDARD PIT DEPTH	
	STANDARD	WITH BUFFER SPRING
EXCELEVATOR	10"	17"
EXCELEVATOR RMR	10"	17"
EXCELEVATOR MRL	10"	17"
PACA-RYDE	8"	15"
PACA-LIFT	8"	15"
PACA-GLIDE	8"	15"

PLEASE CONTACT WAUPACA ELEVATOR FOR MINIMUM PIT DEPTH
STANDARD PIT DEPTH IS BASED ON MAXIMUM FLOOR THICKNESS OF 1 3/4"

Waupaca
ELEVATOR COMPANY™

1726 North Ballard Road
Appleton, WI 54911
Phone: 800-238-8739

ELEVATOR CONTRACTOR: _____

JOB NAME: _____ ORDER NUMBER: _____

**UNIVERSAL RAIL BACKING
FOR PACA & EXCELEVATOR
SERIES ELEVATORS**

DRAWN BY: _____ DATE: _____ SIGNATURE OF APPROVAL: _____ DWG. NO. **C-003015**